


# LOW PROFILE GREASE INTERCEPTOR **WADE**


## 5100-LR (Low Rough-in)

10 GAUGE EPOXY COATED LOW PROFILE GREASE INTERCEPTOR WITH REMOVABLE BAFFLE AND NO-HUB INLET/OUTLETS

PROJECT:  
ENGINEER:  
MECHANICAL:

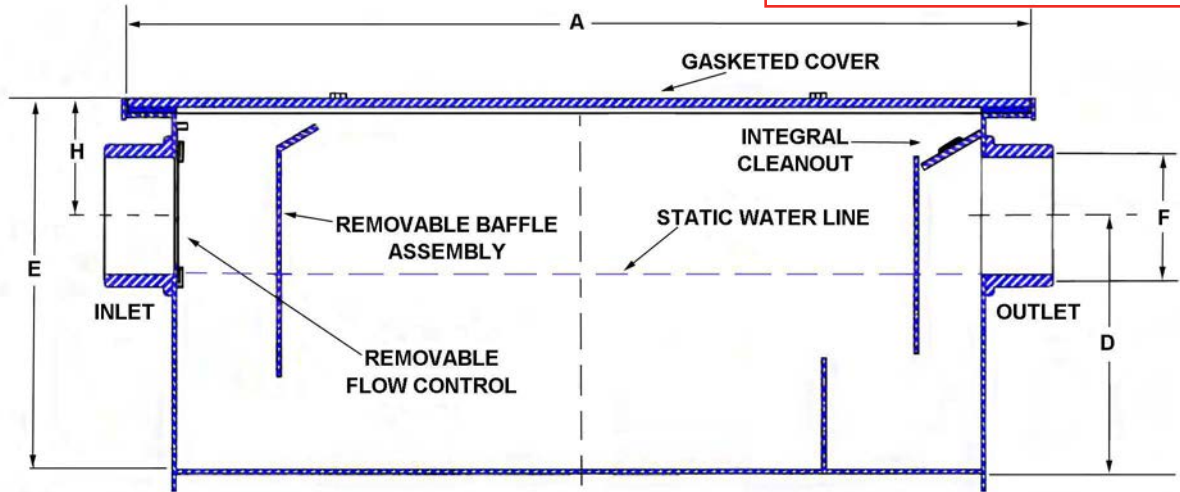

MODEL	FLOW RATE (GPM)	GREASE (IN LBS)	A (IN)	B (IN)	H (IN)	D (IN)	E (IN)	F (IN)	SHIPPING WEIGHT
5120-LR	20	40	34	24	4	7	11	3	150
5135-LR	35	70	42	28	4	7	11	4	200
5150-LR	50	100	46	30	4	7	11	4	225

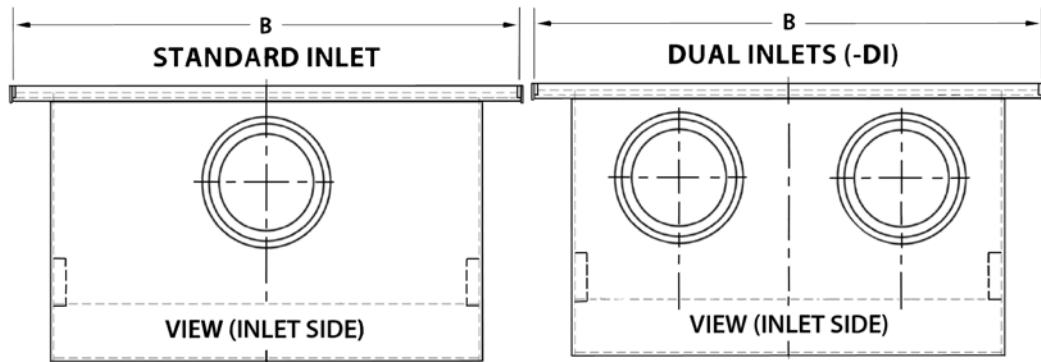

### OPTIONS

Suffix	Description
<input type="checkbox"/> -24	ANCHOR FLANGE
<input type="checkbox"/> -26	ANCHOR FLANGE W/ CLAMP DEVICE
<input type="checkbox"/> -27	SEDIMENT BUCKET

### OPTIONS

Suffix	Description
<input type="checkbox"/> -AC	ALUMINUM COVERS
<input type="checkbox"/> -DI	DUAL INLETS
<input type="checkbox"/> -SS	ALL STAINLESS STEEL (304)

Design and Dimensions are Subject to Modifications