



Project:

Item Number:

Quantity:

## INDUCTION RANGE: MIRAGE® CADET COUNTERTOP



Mirage® Cadet 59300 Countertop Induction Range

### DESCRIPTION

The portable countertop induction range is designed for use in light duty front-of-the-house cooking. Models 59300 and 59310 will plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The top case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner. The bottom case assembly is durable molded plastic.

The induction ranges are equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off
- Safety auto-shut-off function

### Agency Listings — 59300



This device complies with Part 18 FCC Rules.

### Agency Listings — 59310



This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult [www.vollrathco.com](http://www.vollrathco.com) for current product specifications.

### MODELS

59300 1.8kW @ 120V (US only)

59310 1.4kW @ 120V (Canada only)

### FEATURES

- G1 engine with 1 IGBT switch for temperature control
- Full one-year parts and labor warranty
- 20 power levels with optimum power output to a wide variety of induction-ready cookware
- 1-20 power levels or °F/°C temperature level controls
- Easy to read digital readout for power level
- 1-180 minute timer
- 75% efficiency rating
- Pushbutton controls
- Stainless steel case and top. Molded plastic bottom
- Unit comes with cord and plug and does not require hard wiring
- Ranges display HOT when unit is turned off, if the cooking surface is still hot
- FCC listed

### IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- All models require unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

**WARRANTY:** All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

| Approvals | Date |
|-----------|------|
|           |      |



Setting the Standard™

[www.vollrathco.com](http://www.vollrathco.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573



Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462

## INDUCTION RANGE: MIRAGE® CADET COUNTERTOP

|               |              |                                    |
|---------------|--------------|------------------------------------|
| <b>MODELS</b> | <b>59300</b> | <b>1.8kW @ 120V (US only)</b>      |
|               | <b>59310</b> | <b>1.4 kW @ 120V (Canada only)</b> |

### DIMENSIONS


- ❑ Shipping container dimension: 16" x 19¼" x 6½" (40.6 cm x 49 cm x 16.5 cm)
- ❑ Weight of unit: 10 lbs. (4.5 kg)
- ❑ Shipping weight: 12.2 lbs (5.5 kg)
- ❑ Dimensions shown in inches (cm)

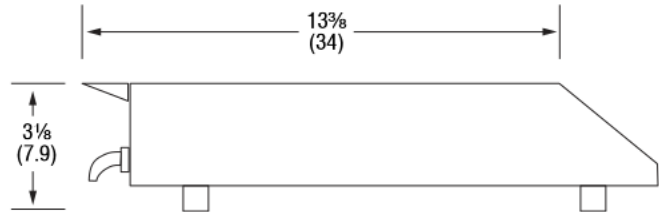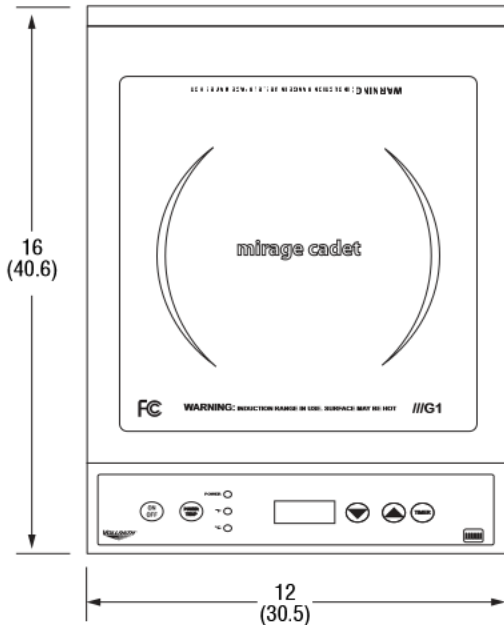

### ELECTRICAL SPECIFICATIONS - 1 PHASE, 60 HZ

| Model | kW Rating | Volts   | Nominal Amps | NEMA Plug |
|-------|-----------|---------|--------------|-----------|
| 59300 | 1.8 kW    | 120V AC | 15           | 5-15P     |
| 59310 | 1.4 kW    | 120V AC | 12           | 5-15P     |

#### Receptacle



www.vollrathco.com

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560  
 Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
 Technical Services Fax: 920.459.5462