YOLLRATH

Project:

Item Number:

Quantity:

MIRAGE® INDUCTION COUNTERTOP RETHERMALIZER





DESCRIPTION

Mirage® Induction Countertop Rethermalizers use innovative technology to run dry (without water) to improve food quality and minimize waste, while using a fraction of the energy. They ship with an induction-ready inset and improved ergonomic cover so they are ready to use upon arrival.

PERFORMANCE CRITERIA

Mirage® Induction Countertop Rethermalizers are designed to take a container of cooked food from a chilled state (below 40.0 °F [4.4 °C]) through the HACCP "danger zone" of 165 °F [73.9 °C]) in less than 90 minutes. The performance standard is measured using the NSF mixture chilled to 35 °F (1.7 °C). The electric unit will raise the temperature of this product above 165 °F (73.9 °C) in less than 90 minutes. The temperature will be maintained above 150 °F (65.6 °C) when the food product and pan or inset are used with a standard pan or inset cover, and the food product is stirred regularly.

AGENCY LISTINGS





WARRANTY

All models shown come with a Vollrath® standard warranty against defects in materials and workmanship. For full warranty details, please refer to vollrathfoodservice.com.

NOTICE: Use only Vollrath induction-ready insets; failure to do so voids the warranty.

Due to continued product improvement, please consult vollrathfoodservice.com for current product specifications.

ITEMS

Item	Description (Pro	Description (Products for US and Canada)						
7470110	7-qt., Silver							
7470140	7-qt., Red	In alcohol 1 book and 11 id						
74110110	11-qt., Silver	Includes 1 Inset and 1 Lid						
74110140	11 -qt., Red							
Accessories	Description							
47493	7-qt. Cover	7-qt. Cover						
47494	11-qt. Cover	11-qt. Cover						
88184	7 qt. Inset	7 qt. Inset						
88204	11 qt. Inset	11 qt. Inset						
88184NS*	71/4 qt. Nonstick Indu	71/4 qt. Nonstick Induction Inset						
88204NS*	11 qt. Nonstick Induc	11 qt. Nonstick Induction Inset						
*Nonstick insets are i	nade to order; call Vollrath f	or minimums and lead time.						


FEATURES & BENEFITS

- 800-watt 3D induction coil heats food evenly and efficiently.
- · Units operate without water, eliminating well refilling.
- Sensors in three locations activate the Stir Light.
- Stir Light reminds user to mix to reduce burning and waste.
- · Advanced controls have highly-visibility LEDs.
- · Temperature setting includes °F and °C.
- · Four presets for soups and mac and cheese simplify use.
- Locking function prevents unauthorized setting changes.
- Temperature limit of 190 $^{\circ}\text{F}$ decreases burning and waste.
- New easy-to-grip cover handles enhance user experience.
- Included cover and inset provide what is needed for use.
- · Additional covers and insets for pre-filling are sold separately.
- Meets NSF4 Performance Requirements for rethermalization and hot-food-holding equipment.
- 6' cord plugs into any NEMA 5-15R 15 or 20 amp 120V receptacle.

CLEARANCE & REQUIREMENTS

- Install unit adjacent to non-combustibles in a flat location.
- Use only Vollrath induction-ready insets; failure to do so could cause damage and void the warranty.
- All models require unrestricted air intake and exhaust for proper operation.
- · Ensure unit is level to avoid damage during operation.
- Ambient temperatures must be at or below 110 °F (43 °C) and are measured while all kitchen appliances are in operation.
- Minimum clearance of 4" (10.2cm) is required at the rear and 1" (2.5 cm) at the bottom.

· To avoid damage, plug the unit into a properly grounded electrical supply that matches the nameplate rating.

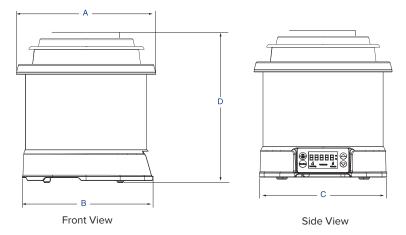

SPECIFICATIONS

DIMENS	DIMENSIONS shown in inches (cm)													
ltem	Description qt. (L)	Volts	Watts	Amps	Hz	Dimensions		Shipping Weight & Dimensions (Including Pallet)				Plug		
						Rim Depth (A)	Base Depth (B)	Width (C)	Height (D)	Weight lb (kg)	w	Н	D	(Included) & Receptacle
7470110	7 (6.6), Natural	120	0 800		50/60	11%	11 ³ / ₁₆	11		12.2				
7470140	7 (6.6), Red			6.7			(30.2)	(27.9)		(5.6)				5-15P (plug)
74110110	11 (10.4), Natural					13% (35.3)	13 ³ / ₁₆ (35.2)	13½ (34.2)		14 ³ / ₄ (37.5) 14.1 (6.4)	15¼ (38.7)	14¾ (37.5)	5-15R (receptacle)	
74110140	11 (10.4), Red													



The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573

Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560 tech service reps@vollrathco.comInduction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832