

# Rosko

JULIEN

RO-RCG

## Gas Countertop Range

 RO-RCG-12

 RO-RCG-24

 RO-RCG-36

 RO-RCG-12-S


RO-RCG-36



### Construction

- Made of grade 430 stainless steel
- Cast iron open burners
- Full width removable crumb tray
- Rear splash guard
- 1" (25 mm) adjustable stainless steel feet
- Optional 4" (102 mm) stainless steel adjustable legs

### Operation

- All models offer a propane or natural gas power supply :
  - Factory assembled for a natural gas installation, including a pressure regulator
  - Propane conversion kit included
  - Power conversion must be completed by a certified technician
- Thermostatic safety valve available on some models
- Power outputs from 32 000 à 96 000 BTU/H available depending on the model
- Adjustable temperature by independent infinity controls
- 3/4" (19 mm) NPT gas connector

### Legal

- All models require a 6" (152 mm) clearance on both sides as well as behind the unit if next to combustible material
- All models require commercial installation and are not intended for residential use
- One (1) year limited warranty on parts and labor
- Certified to CSA 1.8-2016 Ed.4/ANSI Z83.11-2016 Ed.4 standards

### Option



- RO-ACC-4LEG – Set of 4" (102 mm) Adjustable Legs



955, rue Lachance  
Québec, QC G1P 2H3  
Canada

1 800 461-3377  
www.rosko-julien.ca

*Due to the continuous development of the product,  
specifications are subject to change without notice*

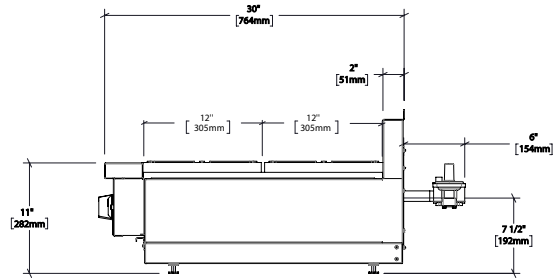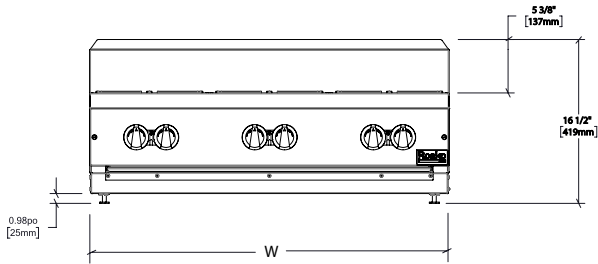

| Models      | Width (W)    | Depth        | Total height | Cooking surface    | Weight         | Shipping dimensions (W x D x H) |
|-------------|--------------|--------------|--------------|--------------------|----------------|---------------------------------|
| RO-RCG-12   | 12" - 305 mm | 30" - 762 mm | 16" - 406 mm | 12 x 23 3/4"       | 70 lb - 31 kg  | 18 x 36 x 21"                   |
| RO-RCG-12-S |              |              |              | 305 x 603 mm       |                |                                 |
| RO-RCG-24   | 24" - 610 mm |              |              | 24 x 23 3/4"       | 120 lb - 54 kg | 38 x 38 x 24"                   |
| RO-RCG-36   | 36" - 914 mm |              |              | 610 x 603 mm       |                |                                 |
|             |              | 36 x 23 3/4" | 914 x 603 mm | 965 x 965 x 610 mm |                |                                 |

| Models      | Total output | Number of controls/burners | Natural gas operating pressure | Propane gas operating pressure | Thermostatic safety valve [Option S] |
|-------------|--------------|----------------------------|--------------------------------|--------------------------------|--------------------------------------|
| RO-RCG-12   | 32 000 BTU/H | 2                          | 7 po W.C.                      | 11 po W.C.                     |                                      |
| RO-RCG-12-S |              |                            |                                |                                | ■                                    |
| RO-RCG-24   | 64 000 BTU/H | 4                          |                                |                                |                                      |
| RO-RCG-36   | 96 000 BTU/H | 6                          |                                |                                |                                      |