



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Top Mount 1/2 Door Reach-In Freezers

MODELS:
MBF8007GR / MBF8007GRL / MBF8008GR

Standard Features

- Top mount compressor with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic Temperature Controller
- Maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three(3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf, shelf part #: W0402389



MBF8007GR



MBF8007GRL



MBF8008GR

For the best results of food preservation we recommend setting your freezer between -8°F to 0°F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY



MBF8007GR
MBF8007GRL



REV. 08/24



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,


New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8007GR	2	21.4	3	4	6.3	115/60/1	1/2	R290	28 ^{3/4} ×31 ^{3/4} ×81 ^{1/4}	254	287
MBF8007GRL	2	21.4	3	4	6.3	115/60/1	1/2	R290	28 ^{3/4} ×31 ^{3/4} ×81 ^{1/4}	254	287
MBF8008GR	4	43.2	6	4	8.6	115/60/1	3/4	R290	51 ^{3/4} ×31 ^{3/4} ×81 ^{1/4}	353	403

PLAN VIEW



MBF8007GR

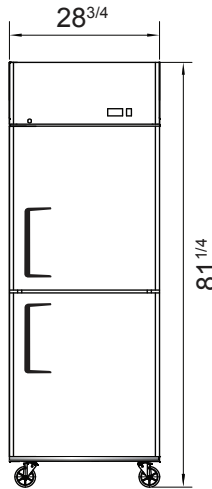



MBF8007GRL

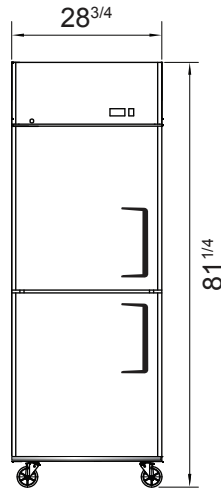

MBF8008GR

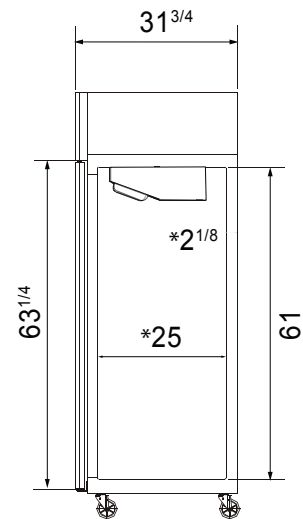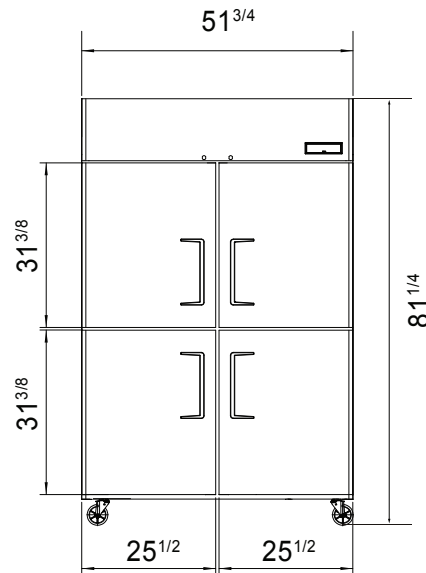

*Interior Dimensions

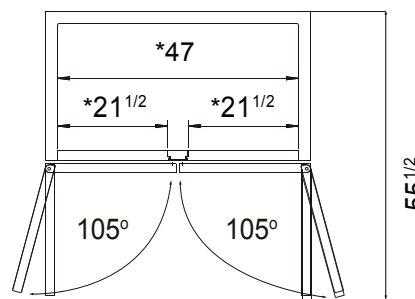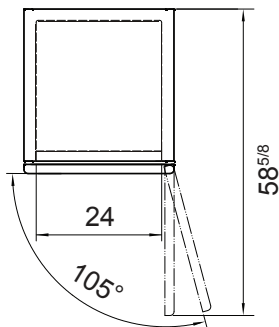

SELF-CLOSING AND STAY OPEN DOOR FEATURE

Casters




Epoxy shelves



Door lock




Down duct



Temperature control



NEMA 5-15P



NEMA 15A/125V