

## ECOLOGY NORTH AMERICA E29E-A

<b>TYPE</b>	Glasswasher
<b>LINE</b>	ECOLOGY NORTH AMERICA
<b>BASKET</b>	400x400
<b>SIZE</b>	470x535x710h - 18.5039x21.063x27.9528in



The E29E-A model is suitable for washing cups, glasses, saucers and dishes (using the appropriate rack) with a useful passage up to 315 mm. The addition of the Reverse Osmosis System, suitable detergents and tilted rack is the right answer for all premises where perfect glasses and automatic drying are indispensable elements.

This model is ETL and ETL Sanitation certified as it meets the requirements of the NSF/ANSI 3 rule. The washing cycles have been specifically designed to make the dishwasher compliant with the NSF hygienic safety standards, recognized by the American National Standards Institute (ANSI).

The dishwashers of the ECOLOGY line ensure maximum performance thanks to the standard Acquatech System which, through an atmospheric boiler and rinse pump, maintains constant temperature and pressure and optimum water consumption. Ecology ensures a sanitising rinse cycle and proves to be the perfect choice for canteens, nursing homes, pastry shops, bakers and butchers where compliance with HACCP rules is essential. For those who seek glass perfection, it is possible to connect a Reverse Osmosis System which purifies water and reduces detergent and rinse-aid consumption, ensuring excellent results and perfect glasses without the need for hand drying.


The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the boiler from the hot water, preventing limestone forming inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all components in the front to allow easy technical assistance. Sturdy and reliable dishwashers to best deal with every moment of your day.

CERTIFIED



ON REQUEST



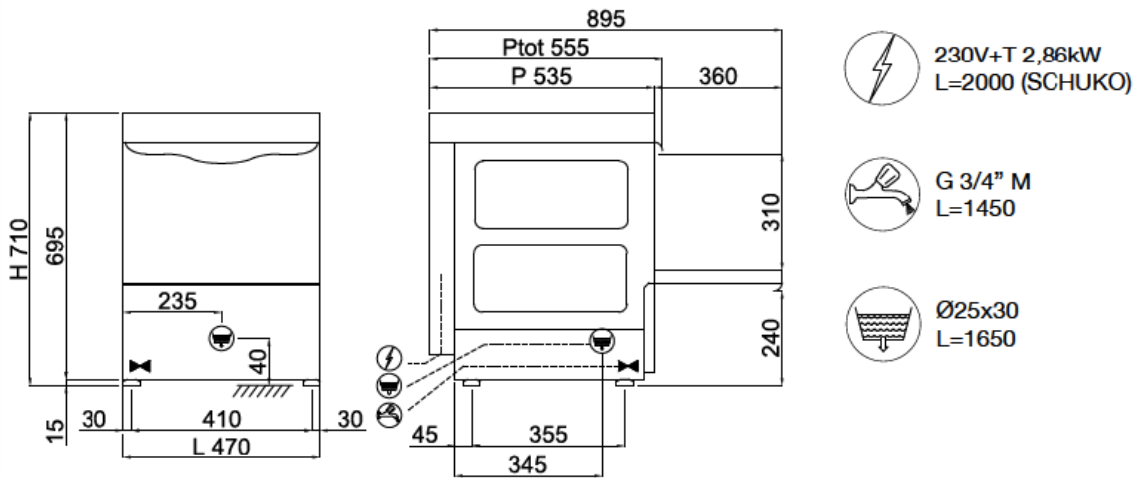

**DISHWASHERS FEATURES**

Dimensions - (mm) L - P - H	470x535x710h - 18.5039x21.063x27.9528in
n° baskets/hour - (+55°C)	Max 48
Height glass max	285mm
Ø height plate max	305mm
Tank heating element - Tank capacity	2,6kW - 17lt
Boiler heating element - Boiler capacity	2,6kW - 5,6lt
Washing pump	0,26kW / 0,35Hp
Total power input / Current	2,86kW / 16A
Standard input voltage	208V - 60Hz
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt GUARANTEED
Adjustable detergent and rinse-aid dispenser	ELECTRIC
Acquatech system rinse	si
Packing	670x570x890h 0,34/48

**OPTIONAL**

Drain pump kit 32W with Ecoclean	●
Double wall for thermal and acoustic insulation +18mm	●
Inclined basket for wine glasses dim.400x400x170mm	●
Kit 4 Stainless steel feet 50-70mm	●
"SOFT Door" Opening/Closing System	●
Kit with 2 Baskets and Stand	●

● Optional Installabile, ◻ Optional not installabile